





# MODEL SLJ-4-30 FORMED STATIONARY LOUVER STRAIGHT BLADE.

## Standard Construction:

- Frame:** 4" (101 mm) x 20 ga. galvanized steel.  
**Blades:** 20 ga. galvanized steel,  
approximately 3" (76 mm) on centers.  
**Blade Angle:** 30°  
**Screen:** Bird screen - 1/2" x 1/2" (12.7 mm x 12.7 mm) x 19 ga.  
galvanized steel, in a removable frame on interior of louver.  
**Finish:** Mill galvanized.  
**Minimum Size:** 8"w x 10"h (203 mm x 304 mm)
- Options:**
- Screens:** Insect screen - 18 x 16 mesh aluminum.  
Other: \_\_\_\_\_
- Finish:** Prime Coat  
Baked Enamel  
Kynar 500 Enamel  
Other: \_\_\_\_\_
- Sill Extensions:**
- Flange:** 1-1/2" (38 mm) (front or rear)  
**Material:** Various materials and gauges  
**Notes:** Louvers fabricated 1/4" (6.4 mm) under  
opening size unless otherwise noted.

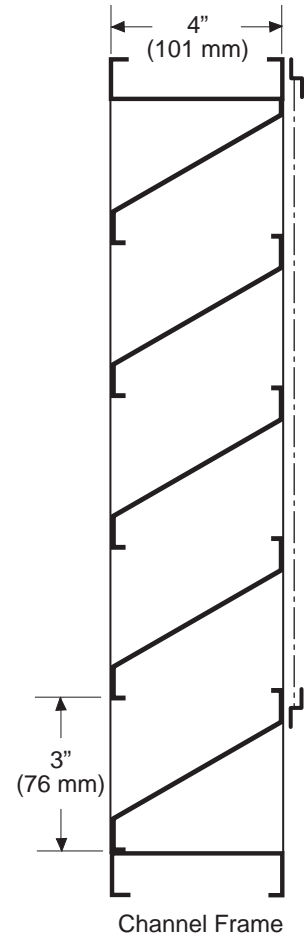

SLJ430 - 7-00

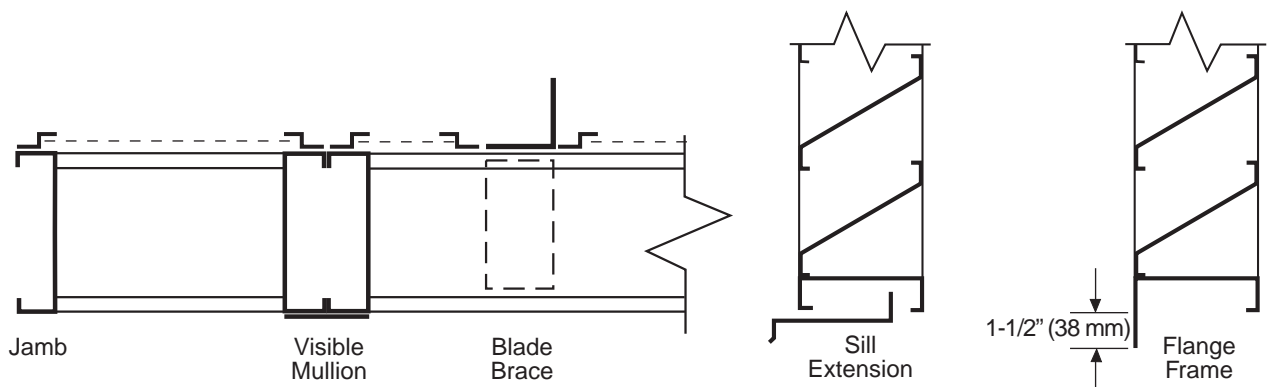

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.  
© JULY, 2000 NCA Manufacturing

Project: \_\_\_\_\_ Contractor: \_\_\_\_\_  
Location: \_\_\_\_\_ Address: \_\_\_\_\_  
Architect: \_\_\_\_\_ P.O. Number: \_\_\_\_\_  
Engineer: \_\_\_\_\_ Date: \_\_\_\_\_