




**MODEL XAZ-4-30**  
**EXTRUDED ALUMINUM LOUVER**  
**STEP BLADE.**

**Standard Construction:**

- Frame:** 4" x .081 (101 mm x 2.1 mm) extruded aluminum (6063-T5).
- Blades:** .081 (2.1 mm) extruded aluminum (6063-T5), approximately 3" (76 mm) on centers.
- Blade Angle:** 30°
- Screen:** Bird screen - 3/4" x .050 (19 mm x 12.7 mm) flattened expanded aluminum in a removable frame on interior of louver.
- Finish:** Mill aluminum.
- Minimum Size:** 8"w x 10"h (203 mm x 254 mm)


**Options:**

- Screens:** Insect screen - 18 x 16 mesh aluminum  
 1/2" x .063 (12.7 mm x 1.6 mm) aluminum.  
 Other - \_\_\_\_\_
- Finish:** Prime Coat  
 Baked Enamel  
 Clear Anodize - 204-R1 and 215-R1  
 Integral Color Anodize  
 Kynar 500 Enamel  
 Other - \_\_\_\_\_
- Sill Extensions:**
- Flange:** 1-1/2" (38 mm) (front or rear)
- Notes:** Louvers fabricated 1/4" (6.4 mm) under opening size unless otherwise noted.

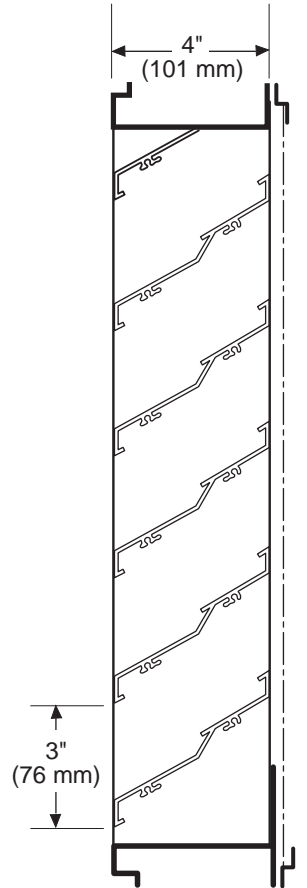

Channel Frame

XAZ430 - 7-00

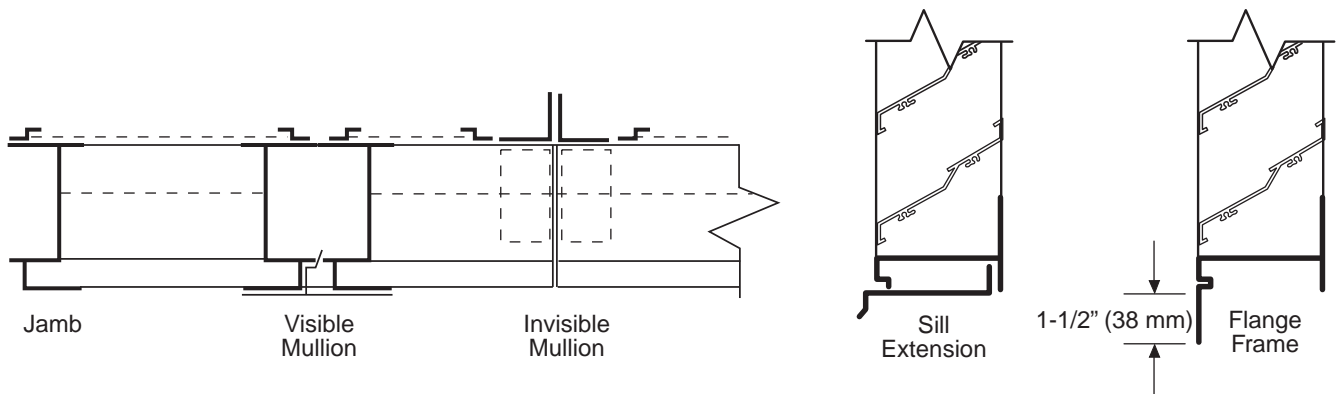

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.  
 © JULY, 2000 NCA Manufacturing

Project:	Contractor:
Location:	Address:
Architect:	P.O. Number:
Engineer:	Date: