






Maximum Support Plate Spacing: 5'0". Locate Support Plate Over "Purlin" Whenever Possible.

PARALLEL SUPPORT PLATE ASSEMBLY

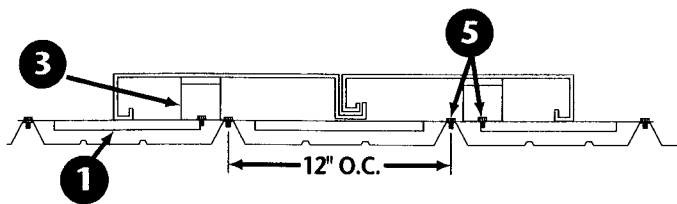

PERPENDICULAR BOLT ASSEMBLY

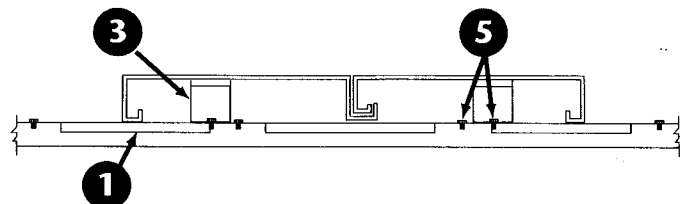

	DESCRIPTION	PART NUMBERS
1 	Support Plate	G760-PG
3 	Hold Down Clip	G607-PG
5 	Self-Drilling/Self-Tapping Screw	GHTSO12075-EG

* Group F requires that a sealant (not supplied) be applied under each support plate.

IMPORTANT INSTALLATION NOTICE:

The penetration method shown here is the only method to be used when installing a Roofwalk System on a Panel Rib roof. This is due to the design of the "Panel Rib" roof not having a standing seam for the Roofwalk to be attached. **BEFORE INSTALLATION BEGINS**, please contact your representative for further information. Roof manufacturers warranty may be made void and Unistrut Corporation declines responsibility for any void in warranty!