



**SPECIALTY STATIONARY LOUVERS
EXTRUDED ALUMINUM
TRIANGULAR & TRAPEZOIDAL SHAPES
MODEL SERIES: 1600**

Nailor specialty shape louvers are available in a variety of blade/frame designs. The following louver models are available in specialty shapes as shown:

- | | | | | |
|-------------------|--------------------|-------------------|--------------------|-------------------|
| 1602J (SB) | 1604J | 1604D (SD) | 1606J | 1606D (SD) |
| 1602K (SR) | 1604JD (SB) | 1604DD | 1606JD (SB) | 1606DD |
| | 1604KD (SR) | | 1606KD (SR) | |

Note: Use of drainable blades is not recommended on certain shapes. Consult Nailor for specific applications.

PERFORMANCE:

Standard louvers are tested for water penetration and pressure drop in a square configuration only. Performance of specialty shape louvers may vary from that of standard louvers.

Specialty shape louvers are not licensed to bear the AMCA seal.

STANDARD CONSTRUCTION:

FRAME: Type 6063-T5 extruded or formed aluminum. Channel type standard. Frame profile may vary depending upon louver style and shape. Contact Nailor for specific details.

BLADES: Type 6063-T5 extruded aluminum. See applicable louver model submittal sheet for blade profile.

BLADE SUPPORT

BRACKETS: Concealed type, factory installed on rear of louver as necessary. Reinforced with 1" x 1" (25 x 25) vertical angle (adds approximately 1" [25] to overall louver depth).

SCREEN: 3/4" x .051 (19 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).

FINISH: Mill.

MINIMUM SIZE: 20" W x 16" H (508 x 406).

MAXIMUM SINGLE

SECTION SIZE: 120" W x 84" H (3048 x 2134) or 84" W x 120" H (2134 x 3048). Consult Nailor for section details of specific sizes. Larger louvers will require field assembly of smaller sections.

OPTIONS:

- | | |
|---|---|
| <input type="checkbox"/> FL Flanged Frame. | <input type="checkbox"/> ISSS Type 304 S.S. Insect Screen. |
| <input type="checkbox"/> BSSS Type 304 S.S. Bird Screen. | <input type="checkbox"/> PAC Perimeter Anchor Clips. |
| <input type="checkbox"/> BSN No Bird Screen. | <input type="checkbox"/> Other: _____. |
| <input type="checkbox"/> ISA Aluminum Insect Screen. | |

OPTIONAL FINISHES:

- | |
|--|
| <input type="checkbox"/> PC3 Powder Coat AAMA 2603. Color: _____. |
| <input type="checkbox"/> PC4 High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar®). Color: _____. |
| <input type="checkbox"/> PC5 Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar®). Color: _____. |
| <input type="checkbox"/> PCC Prime Coat. |
| <input type="checkbox"/> AN04 Clear Anodized 204-R1. |
| <input type="checkbox"/> AN15 Clear Anodized 215-R1. |


Color Anodized:

- | | |
|--|---|
| <input type="checkbox"/> ANLB Light Bronze. | <input type="checkbox"/> ANMB Medium Bronze. |
| <input type="checkbox"/> ANDB Dark Bronze. | <input type="checkbox"/> ANBK Black. |

OPTIONAL W x H SIZING (1/4" [6.5] Undersize standard):


- | |
|--|
| <input type="checkbox"/> U00 Exact Size. |
| <input type="checkbox"/> U38 Undersize 3/8" (9.5). |
| <input type="checkbox"/> U50 Undersize 1/2" (12.7). |

Contact Nailor for special configurations or requirements.

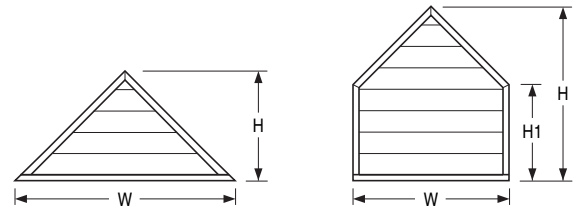


TA


TB




TC




TD




TE




TF




TG




TH



TJ



TYPICAL CHANNEL FRAME (STANDARD)



OPTIONAL FLANGED FRAME (FL)

Dimensions are in inches (mm).

SCHEDULE TYPE:					
PROJECT:					
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.	
CONTRACTOR:	11 - 15 - 10	1600	1600TT-1 7-21-10	1600TT	